


Spring Weighed Check Valve

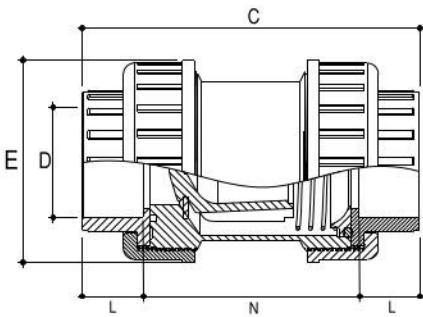

Slip connection.


EPDM O-rings, AISI 316 quality spring.

Transparent body optional.

mm / inch	Code 1 / Code 2	L	N	C	D / ASTM	E	PN	Box
50 / 1-1/2"	131315 / 131315ASTM	33	95	169	50 / 48.3	99	16	6
63 / 2"	131316 / 131316ASTM	34	112	190	63 / 60.3	114	16	6
75 / 2-1/2"	131317 / 131317ASTM	43	131	230	75 / 73	148	16	2
90 / 3"	131318 / 131318ASTM	42	132	230	90 / 88.9	148	16	2
50 / 1-1/2"	131315PC / 131315PCASTM	33	95	169	50 / 48.3	99	16	6
63 / 2"	131316PC / 131316PCASTM	34	112	190	63 / 60.3	114	16	6
75 / 2-1/2"	131317PC / 131317PCASTM	43	131	230	75 / 73	148	16	2
90 / 3"	131318PC / 131318PCASTM	42	132	230	90 / 88.9	148	16	2

"PC" codes for transparent models.


Swing Check Valve

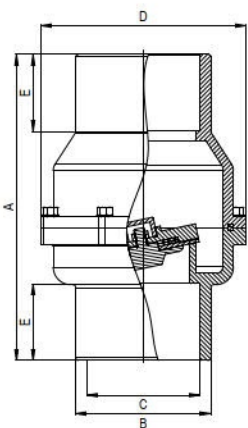

mm	Code	A	B	C	D	E	PN
63	131500Y	160	81	63	124	37	16
75	131501Y	192	95	75	150	45	16
90	131502Y	232	112	90	178	55	16
110	131503Y	296	135	110	202	74	16



Transparent Swing Check Valve

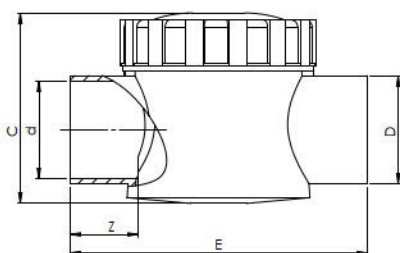

Wide demper opening distance.

Demper closure with spring.

Easy top acces for maintance.

mm	Code	C	d	D	E	Z	DN
63	131800EM	122	63	70	192	44	50

